



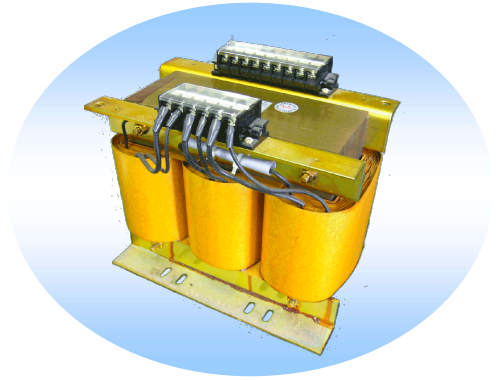

# 三相複巻トランス

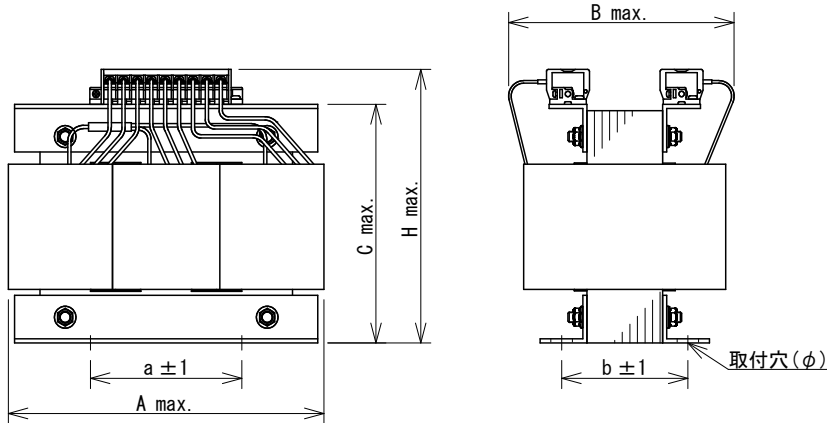


容量 (VA)	型式	外形寸法(mm)				取付寸法(mm)			重量 (Kg)
		Amax	Bmax	Cmax	Hmax	a ± 1	b ± 1	取付穴 (φ)	
100	TL-B20 - 30	150	130	115	140	70	70	8.0	3.5
150	TL-B20 - 45	150	145	115	140	70	85	8.0	4.5
300	TL-B30 - 30	210	150	160	190	120	65	7 × 15	8.0
500	TL-B30 - 50	210	170	160	190	120	85	7 × 15	10.0
750	TL-B30 - 70	210	190	160	190	120	105	7 × 15	15.0
1K	TL-B40 - 50	260	160	190	220	120	90	7 × 17	17.0
1.5K	TL-B40 - 80	260	190	190	220	120	120	7 × 17	25.0
2.5K	TL-B50 - 60	320	180	235	270	150	130	9.0(切り欠き)	35.0
4K	TL-B50 - 100	320	220	235	280	150	170	9.0(切り欠き)	50.0
5.5K	TL-B60 - 80	390	230	280	330	180	150	13.0(切り欠き)	65.0
7.5K	TL-B60 - 120	390	270	280	330	180	190	13.0(切り欠き)	85.0
10K	TL-B70 - 100	450	240	325	390	210	160	13.0	105.0
12K	TL-B70 - 130	450	270	325	390	210	190	13.0	130.0
15K	TL-B70 - 160	450	300	325	390	210	220	13.0	150.0
18K	TL-B80 - 130	510	300	370	420	240	220	13(切り欠き)	170.0
22K	TL-B80 - 170	510	340	370	420	240	260	13(切り欠き)	210.0
28K	TL-B90 - 140	570	280	415	475	270	220	15(切り欠き)	250.0
35K	TL-B90 - 200	570	340	415	485	270	280	15(切り欠き)	300.0


## 【仕様】

- 乾式自冷式
- 連続定格
- 三相(3φ)複巻
- 周波数50/60Hz
- 耐圧AC2.5KV以下
- 端子電圧600V以下
- 端子電流30A以下
- 端子数12以内

TL型  
(端子台)



TV型  
(ビニールリード線)

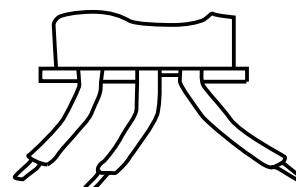

※上記寸法は、電圧・電流・回路数・端子数により、異なる場合があります。