





# バンド型トランス

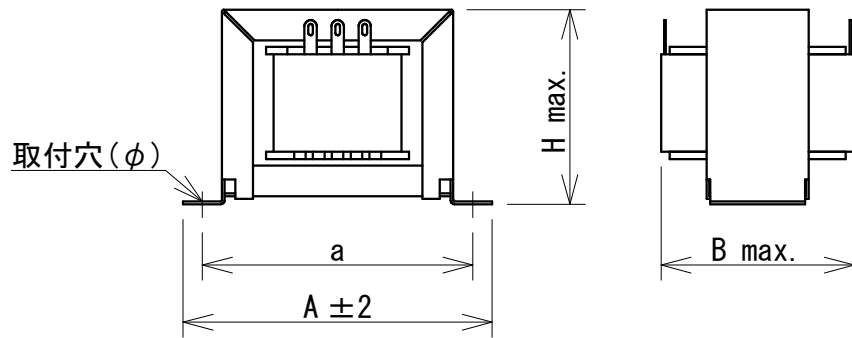


容量 (VA)	型式	寸法 (mm)				取付穴 (φ)
		A ± 2	Bmax	Hmax	a	
0.8	〇〇 - SE28-11	44	30	27	36	3.5 × 5.0
1.4	〇〇 - SE35-10	50.5	30	32	44	4.0
3.0	〇〇 - SE41-13	61	40	36	52	3.5 × 5.0
4.5	〇〇 - SE41-20	60	50	36	52	3.5 × 4.5
6.0	〇〇 - SA0D-25	70	55	44	60	4.5 × 6.0
8.0	〇〇 - SA0E-20	80	55	51	70	4.5 × 6.0
10	〇〇 - SA0E-25	80	60	51	70	4.5 × 6.0
12	〇〇 - SA0E-30	80	65	51	70	4.5 × 6.0
16	〇〇 - SA4F-25	90	65	59	80	4.5 × 6.5
20	〇〇 - SA4F-30	90	70	59	80	4.5 × 6.5
23	〇〇 - SA4F-35	90	75	59	80	4.5 × 6.5
32	〇〇 - SA4G-30	102	75	69	92	4.5 × 6.5
40	〇〇 - SA4G-35	102	80	68	90	4.5 × 6.0
55	〇〇 - SA4H-35	115	85	76	105	4.5 × 6.5
80	〇〇 - SA4I-35	122	85	86	111	4.5 × 6.5
0.8	BS〇 - SE28-11	29.5	30	27	28.5	4.5 × 0.4t
1.4	BS〇 - SE35-10	36.5	30	31	35	5.0 × 0.5t
3.0	BS〇 - SE41-13	42.5	40	35	41.5	5.0 × 0.6t
4.5	BS〇 - SE41-20	42.5	50	35	41.5	6.0 × 0.5t

●80VA以下の小容量で廉価タイプ、量産用に向いています。BSW・BSV型はプリント板用。


【BR型】




【BV型】



【BW型】



【BSW型】



【BSV型】

